CATHEDRAL BLACK SILVERED

PRODUCT INFORMATION

Cathedral Black Silvered Glass, part of Nathan Allan's exclusive Freeform Series, is exciting, new, and the first "texture less" kiln formed glass in our industry. Designed for architects and interior designers who prefer a structured linear glass pattern for their projects. Our Cathedral Black Silvered texture has 1.5" (38mm) wide, protruding Convex shaped flutes. The protruding pattern creates a 3D surface effect. Illuminating this 3D effect is the Silvered (Mirror) finish applied to the back surface. The Silvered finish reflects light and highlights the Cathedral Black Silvered texture to another level. Ideal for all cladding applications where the glass can be pressed against another wall surface, to hide or block the surface. A perfect application for our Cathedral Black Silvered Glass is the back wall of any hotel registration area or entrance lobby. Also, apply our Silvered glass options to make a simple column become bold and vibrant.



Minimum Panel Size	1'0 x 1'0 (300 mm x 300 mm)
Standard Maximum Panel Size –Single layers of tempered glass	3/8" Glass – 5'0 x 10'0 (10mm – 1500mm x 3000mm) 1/2" Glass – 5'0 x 10'0 (12mm – 1500mm x 3000mm)
Standard Maximum Panel Size –Double layers of laminated glass	1/2" Glass – 4'0 x 9'0 (12mm glass – 1219mm x 2743mm) 3/4" Glass – 5'0 x 10'0 (19mm glass – 1500mm x 3000mm)
Finished Panel Size	All orders are produced with finished, cut to size, ready to install panels
Individual Panel Thickness	3/8", 1/2" (10mm, 12mm)
Glass Types	Clear · Low Iron · Bronze · Black · View All Glass Types
Edgework	Machine flat polished
Flat Margins	Outside Vertical Edges – from 1/4" to 3/4" (6mm to 19mm). Interior Vertical Edges – 1/16" to 1/8" (4mm to 6mm) · More about Flat Margins
Pattern Details	If using 3/8" (10mm) thick flat glass, after pattern is formed, overall pattern thickness increases to 1/2"(12mm). Pattern thickness may vary , so allow 1/16" (2mm) variance. Front surface has a Convex shape, while back surface has a Concave shape. Individual flutes are 1.5" (38mm) wide. Click on **"Product Info"** button below, for detailed drawings.
Safety	Tempered or Laminated
Viewing	Silvered glass is designed to be pressed against another wall surface and viewed only from the front side.
Cleaning	Our glass products can be cleaned with liquid cleaners and paper towels, or soft clothes. Liquid cleaners without ammonia will help reduce streaks on the glass. Avoid all abrasive cleaning materials.

103 - 2455 192 St. Surrey, V3Z 3X1 Canada
tel. 604.535.8849, fax. 604.535.6664
www.nathanallan.com

CATHEDRAL GLASS PROFILE, SECTION VIEW

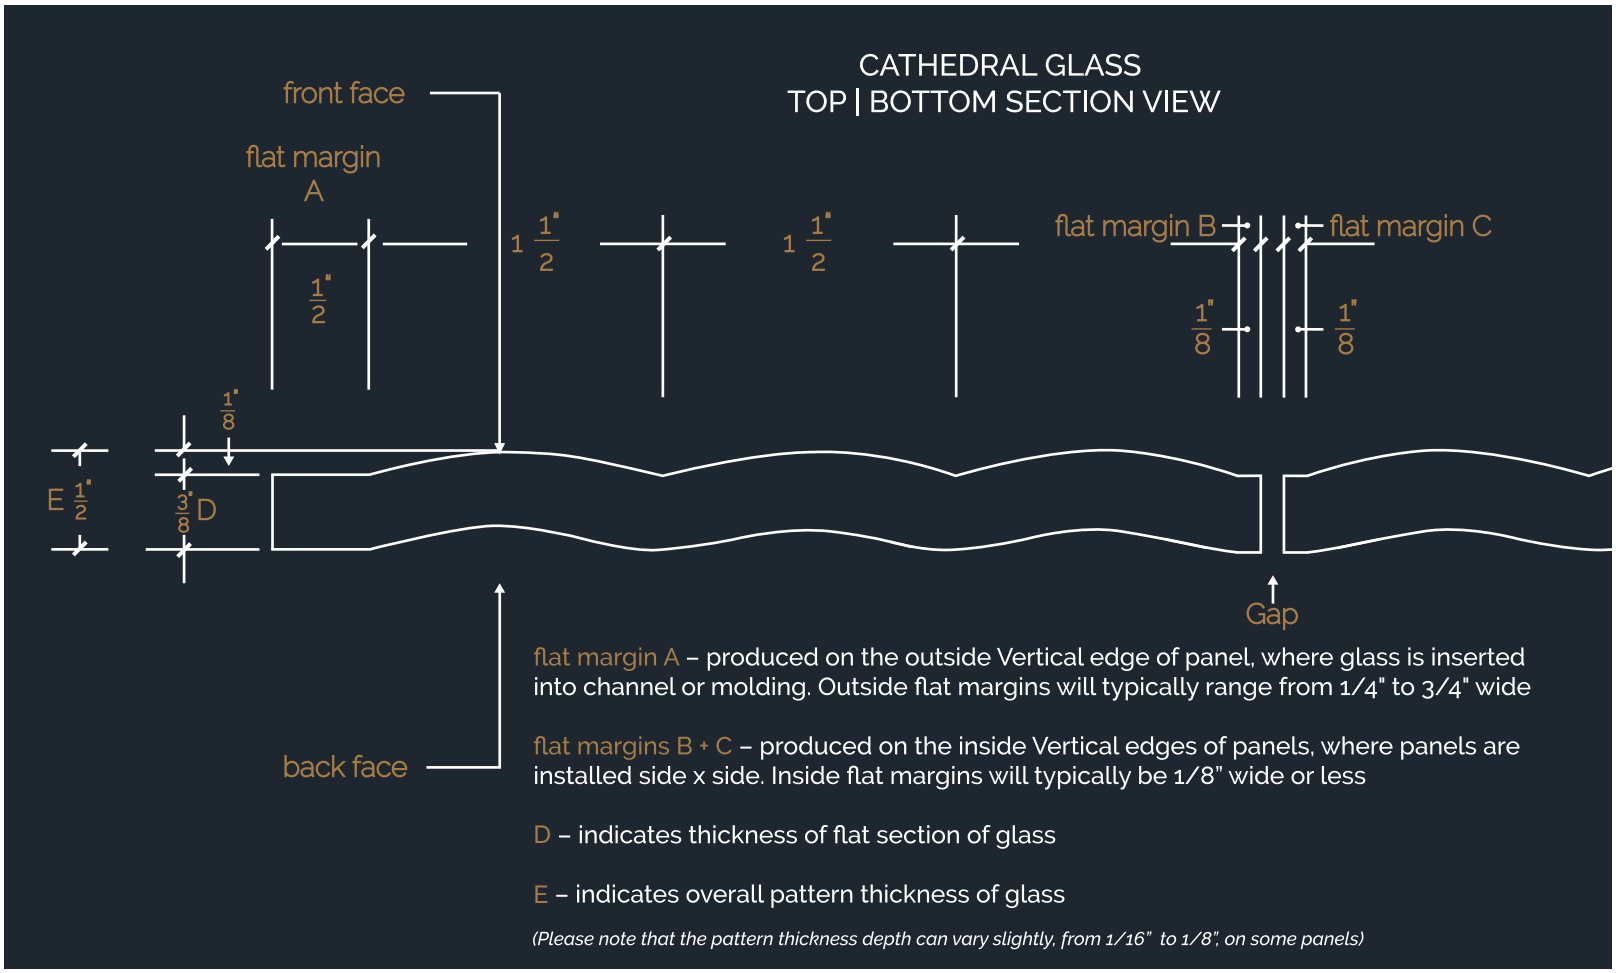

flat margin A – produced on the outside Vertical edge of panel, where glass is inserted into channel or molding. Outside flat margins will typically range from 1/4" to 3/4" wide

flat margins B + C – produced on the inside Vertical edges of panels, where panels are installed side x side. Inside flat margins will typically be 1/8" wide or less

D – indicates thickness of flat section of glass

E – indicates overall pattern thickness of glass

(Please note that the pattern thickness depth can vary slightly, from 1/16" to 1/8", on some panels)

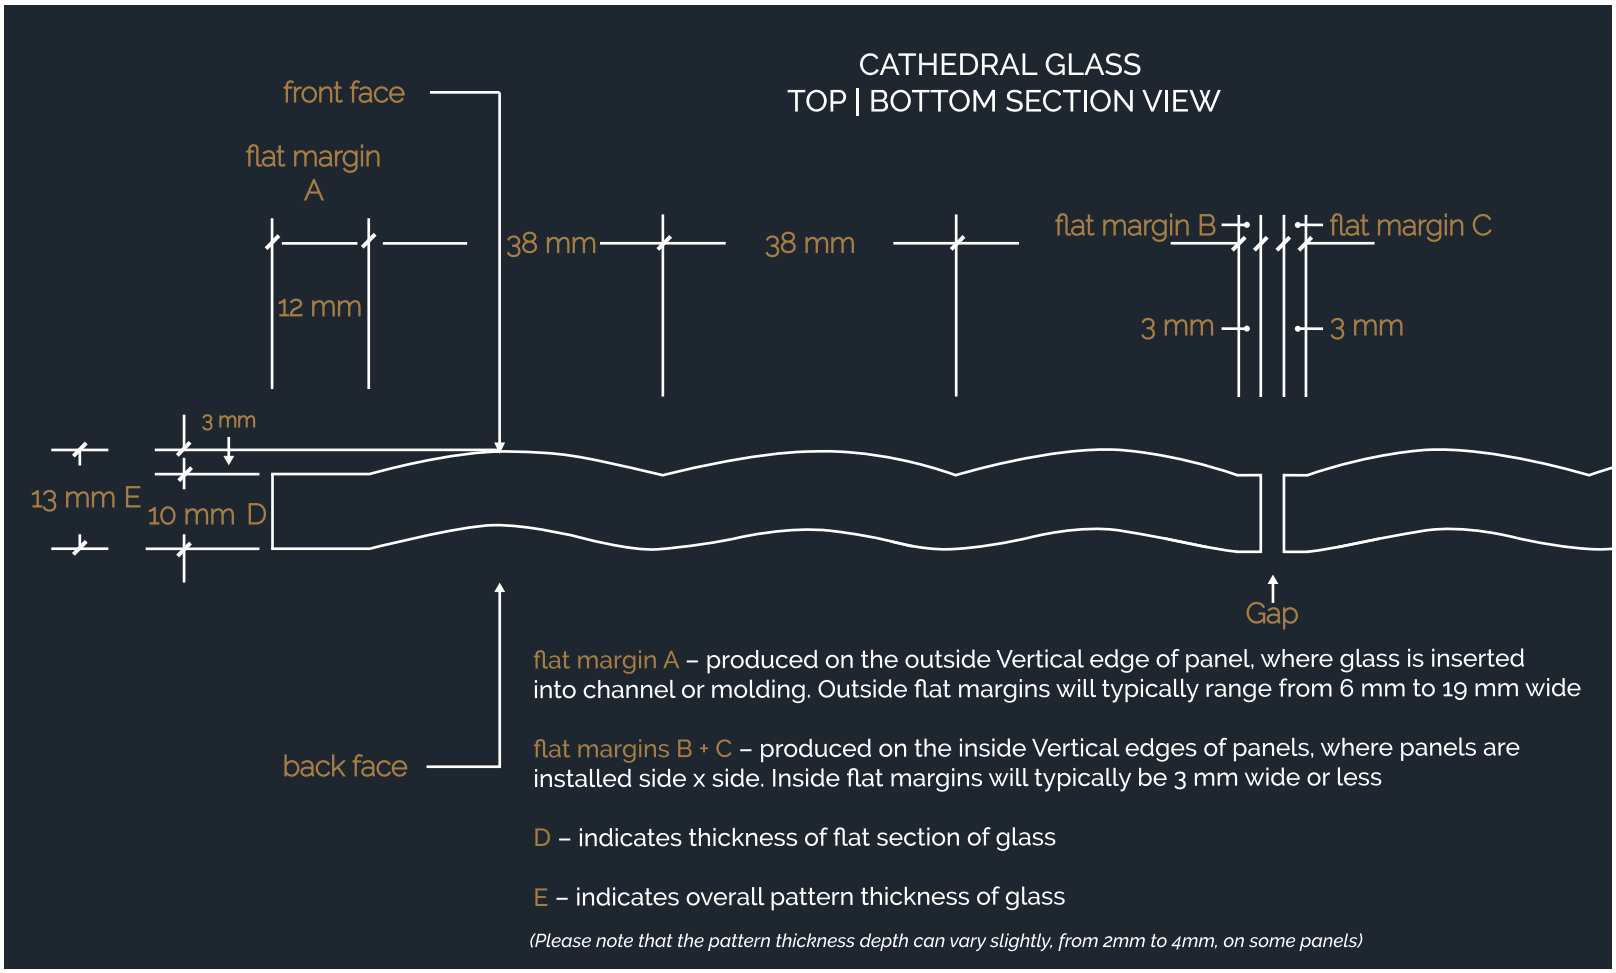

flat margin A – produced on the outside Vertical edge of panel, where glass is inserted into channel or molding. Outside flat margins will typically range from 6 mm to 19 mm wide

flat margins B + C – produced on the inside Vertical edges of panels, where panels are installed side x side. Inside flat margins will typically be 3 mm wide or less

D – indicates thickness of flat section of glass

E – indicates overall pattern thickness of glass

(Please note that the pattern thickness depth can vary slightly, from 2mm to 4mm, on some panels)